

MB SERIES

**FEATURES: GENERAL PURPOSE SNAP-IN TERMINAL TYPE
CAPACITORS RECOMMENDED FOR USE IN
SWITCHED MODE POWER SUPPLIES, INDUSTRIAL
AND Entertainment ELECTRONIC SYSTEMS.**

ENDURANCE: +85°C, 2000 Hrs

**REFERENCE
STANDARDS: IS4317/ IEC 384-4**

**PRODUCT
MARKING**



**PROVIDED WITH ORANGE COLOUR
SLEEVE AND BLACK PRINT**

1. SPECIFICATIONS


PARAMETERS.	PERFORMANCE CHARACTERISTICS																																								
Operating Temperature	- 40° C to +85° C for WV ≤ 250 Vdc & -25° C to +85° C for WV > 250 Vdc.																																								
Working Voltage	16 Vdc to 450 Vdc																																								
Capacitance Range	47µF to 47,000µF (at +27° C, 100 Hz)																																								
Capacitance Tolerance	± 20%																																								
Leakage Current (After 5mt charging through 1000 Ω resistor) IL in µA	IL ≤ 3 √ (CV) Where IL = Leakage current in µA C= Capacitance (µF), V= Working Voltage in Volt																																								
Dissipation factor (Tan δ) Max (at +27° C, 100 Hz)	<table border="1"> <tr> <td>W V in Volts Diameter in mm</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100-250</td> <td>350-450</td> </tr> <tr> <td>22</td> <td>35</td> <td>25</td> <td>20</td> <td>18</td> <td>12</td> <td>10</td> <td>10</td> </tr> <tr> <td>25</td> <td>40</td> <td>30</td> <td>25</td> <td>20</td> <td>15</td> <td>10</td> <td>10</td> </tr> <tr> <td>30</td> <td>45</td> <td>35</td> <td>30</td> <td>25</td> <td>20</td> <td>12</td> <td>10</td> </tr> <tr> <td>35</td> <td>55</td> <td>40</td> <td>35</td> <td>30</td> <td>25</td> <td>15</td> <td>10</td> </tr> </table>	W V in Volts Diameter in mm	16	25	35	50	63	100-250	350-450	22	35	25	20	18	12	10	10	25	40	30	25	20	15	10	10	30	45	35	30	25	20	12	10	35	55	40	35	30	25	15	10
	W V in Volts Diameter in mm	16	25	35	50	63	100-250	350-450																																	
	22	35	25	20	18	12	10	10																																	
	25	40	30	25	20	15	10	10																																	
	30	45	35	30	25	20	12	10																																	
35	55	40	35	30	25	15	10																																		
Life Tests	<table border="1"> <thead> <tr> <th>Tests</th> <th>Endurance DC Life Test</th> <th>Storage Shelf Life Test</th> </tr> </thead> <tbody> <tr> <td>Test Condition</td> <td>Capacitor at rated voltage And at +85° C for 2000 Hrs Measurements after recovery to +27° C</td> <td>Capacitor under no voltage At +85° C for 1000 Hrs Measurements after recovery to +27° C</td> </tr> <tr> <td>Δ Capacitance</td> <td>Within ± 30% for WV 16V to 25V Within ± 25% for WV 35V to 100V Within ± 20% for WV 160V to 450V of the initial measured Value</td> <td>Within ± 20% of initial measured Value</td> </tr> <tr> <td>Tan δ</td> <td>Within 200% of initial limit</td> <td>Within 150% of initial limit</td> </tr> <tr> <td>D.C Leakage Current</td> <td>Within initial limit</td> <td>Within 150% of initial limit</td> </tr> </tbody> </table>	Tests	Endurance DC Life Test	Storage Shelf Life Test	Test Condition	Capacitor at rated voltage And at +85° C for 2000 Hrs Measurements after recovery to +27° C	Capacitor under no voltage At +85° C for 1000 Hrs Measurements after recovery to +27° C	Δ Capacitance	Within ± 30% for WV 16V to 25V Within ± 25% for WV 35V to 100V Within ± 20% for WV 160V to 450V of the initial measured Value	Within ± 20% of initial measured Value	Tan δ	Within 200% of initial limit	Within 150% of initial limit	D.C Leakage Current	Within initial limit	Within 150% of initial limit																									
	Tests	Endurance DC Life Test	Storage Shelf Life Test																																						
	Test Condition	Capacitor at rated voltage And at +85° C for 2000 Hrs Measurements after recovery to +27° C	Capacitor under no voltage At +85° C for 1000 Hrs Measurements after recovery to +27° C																																						
	Δ Capacitance	Within ± 30% for WV 16V to 25V Within ± 25% for WV 35V to 100V Within ± 20% for WV 160V to 450V of the initial measured Value	Within ± 20% of initial measured Value																																						
	Tan δ	Within 200% of initial limit	Within 150% of initial limit																																						
D.C Leakage Current	Within initial limit	Within 150% of initial limit																																							
(i). Endurance Test at High Temperature +85° C at WV.																																									
(ii). Storage Test at High Temperature +85° C at 0V.																																									

2. OTHER INFORMATION

Standard Rating size, Ripple current and frequency multiplier	Refer Page No. 2&3.
Capacitor Codification System	Refer page no.4
Dimensional Specification	Refer section 4 for details
Marking Specification	Refer Page no. 5
Type of Packing and Lead Configuration	Bulk Packing – in cardboard cartons with separator. Lead out provided with SNAP-IN terminals to hold component in place on PC board Refer Section 9

MB SERIES

3. PHYSICAL OUTLINE – MB SERIES

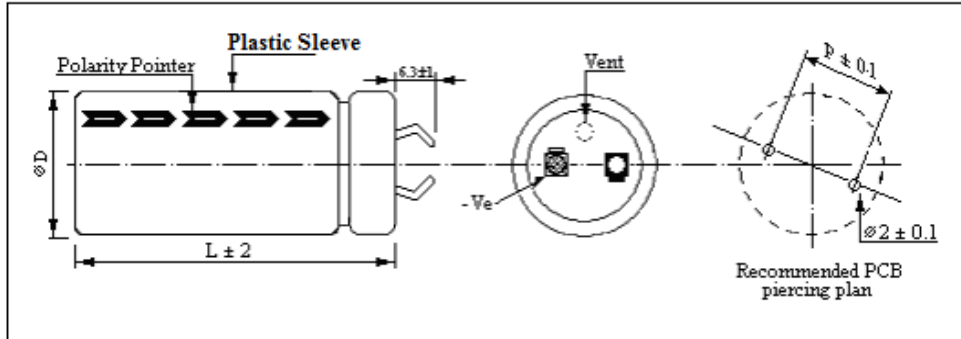

All dimensions in mm

Note: Pressure Relief Vent may be Positioned Either in the Casing or in the Cover.

4. DIMENSIONS (All units in mm)

Case code		AC	AD	BB	BC	BE	BF	CE	CF	CG	DG	DK	DM
Diameter	$\varnothing D \pm 1$ (mm)	22	22	25	25	25	25	30	30	30	35	35	35
Length	$L \pm 2$ (mm)	35	40	30	35	45	50	45	50	55	55	70	80
Pitch	$P \pm 0.1$ (mm)	10	10	10	10	10	10	10	10	10	10	10	10

5. STANDARD RATING TABLE

Provides detailed information regarding applicable case size and the appropriate ripple current handling capability of the defined case size.

Cap (µF) \ WV SV	16 19		25 30		35 41		50 58		63 73		100 115	
	CC	RC	CC	RC	CC	RC	CC	RC	CC	RC	CC	RC
470											AC	1.51
680											AC	1.82
1000									AC	1.98	AC BC	2.04 2.35
1500									AC	2.21	BC	2.56
2200							AC	2.04	AC	2.45	BE	3.2
3300					AC	2.14	AC	2.45	BC	2.80	CG	4.19
4700			AC	1.95	AC	2.45	BC BE	3.11 3.31	BE	3.68	DG DK	5.24 5.48
6800			AC	2.56	BC	2.91	BE	3.88	CE	4.66		
10000	AC	2.91	AC	3.20	BE	3.68	CE CG	5.04 5.24	DG DK	6.01 6.29		
15000	AC	3.59	BC	3.73	CE	4.75	DG DK	6.52 6.76	DK	7.34		
22000	BC	4.26	BF	4.89	DG	6.31	DM	7.81				
33000	BF	5.34	CG DK	6.17 6.51								
47000	DG	7.28	DM	7.77								

MB SERIES

STANDARD RATING TABLE (Contd.)

WV SV Cap (µF)	160		200		250		350		400		420		450	
	CC	RC	CC	RC	CC	RC	CC	RC	CC	RC	CC	RC	CC	RC
47							AC	0.67	AC	0.58	AC	0.55	AC	0.55
68					AC	0.81	AC	0.83	AC	0.76	AC	0.75	AC	0.75
100					AC	0.96	AC	1.2	AC	0.96	AC	0.93	AC BC	1.04
150			AC	1.15	AC	1.10	BC	1.44	BC	1.38	BC	1.35	BE	1.35
220			AC	1.50	AC	1.35	BE	1.82	BF	1.78	CE	1.85	CE	1.78
330	AC	1.57	BC	1.93	BE	1.92	CE	2.42	CG	2.22	CG	2.19	DG	2.31
470	BC	2.02	BE	2.49	BF	2.42	DG	3.07	DG	2.90	DG	2.77	DG	2.77
680	BE	2.60	CE	3.08	DG	3.00	DK	3.81	DM	3.75				
1000	CE	3.37	DG DK	3.84 4.20	DG	3.81								

Abbreviations used:

WV: Working voltage of the capacitor in Volts.

Cap: Capacitance in microfarad.

RC: Maximum Ripple current allowed in ampere at 100 Hz/ +85°C.

SV: Surge voltage in volts.

CC: Case code.

Frequency Multiplier for Ripple Current

Freq Voltage	50	100	120	300	1K	10K or more
16-100	0.88	1	1.03	1.11	1.18	1.18
160-250	0.85	1	1.04	1.12	1.19	1.24

9. PACKING QUANTITY


MB Series capacitors are generally packed in PRIMARY cardboard cartons by employing suitable separators to avoid damage during transit. The primary cartons are then inserted into MOTHER cardboard cartons before shipment.

Case Code	AC	AD	BB	BC	BE	BF	CE	CF	CG	DG	DK	DM
Nos / Carton	392	392	288	288	288	288	200	200	200	162	81	81

MB SERIES


CAPACITOR ORDERING INFORMATION FOR MB SERIES CAPACITORS

Capacitors are identified with the help of a 12-digit code. Expansions of Part Nos are identified below.

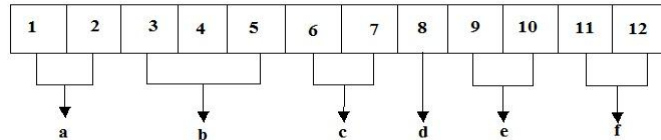

a						b							
Series Code						Capacitance Value Code							
MB – Large can snap-in terminal type						Indicates Cap. Value in microfarad Eg (i) 47µF is coded as 470 (ii) 470 µF is coded as 471 (iii) 4700µF is coded as 472							
C													
Voltage Code													
Working Voltage (V)	16	25	35	50	63	100	160	200	250	350	400	420	450
Code	1C	1E	1V	1H	1J	2A	2C	2D	2E	2V	2G	2U	2W
d				e				f					
Capacitance Tolerance Code				Size Code				Packing Code					
A - Special tolerance				AC – DM for MB Capacitor For details refer to the corresponding dimension section.				BO – Bulk Packing					
M - ± 20%													
K - ± 10%													
N - ± 30%													
P±-30%/+0%													


Example (i) MB Series 100µF/450V
Snap-in terminal type

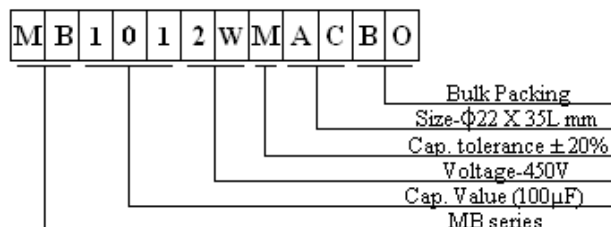

MB SERIES

MARKING ON THE CAPACITOR FOR MB SERIES CAPACITORS

Product information is printed on the Plastic sleeve. MB Capacitors are provided with orange colored sleeve. The following information's are marked on the capacitor.

- a) Manufacturer's name & logo

- b) Capacitor series and upper category temperature
- c) Nominal capacitance value in μF
- d) Capacitance tolerance in %
- e) Rated working voltage in V
- f) Date code (Year - Month)
- g) Negative terminals are indicated in the sleeve.

Date Code for MB series capacitors:

Date code is provided on the capacitor sleeve in Year – Month format. The details are as given below.

Year code

Year	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009
Letter Code	M	N	P	R	S	T	U	V	W	X

Year	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019
Letter Code	A	B	C	D	E	F	H	J	K	L

Year codes repeats after each cycle of 20 years.

Month code

Month	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug	Sep.	Oct.	Nov	Dec.
Code	1	2	3	4	5	6	7	8	9	O	N	D