

Al can construction with resin top and flexible multistrand wire leads out for panel board application

Metallized Polypropylene (MPP) Capacitors are film Capacitors, made out of two Al-Zn metallized films with plastic film acting as dielectric. ARW-PB series MPP Capacitors are with resin top sealing, flexible multistrand copper wire leads out and encapsulated in Al can with black cap.

1. SPECIFICATIONS

Series	ARW-PB Series
Туре	Metallized Polypropylene Capacitors for panel board application
Rated Voltage	440 Vac
Rated Frequency	50/60 Hz
Climatic Category	-25/85°C/21
Туре	MPP-SH
Safety Protection	P0
Capacitance Range	8 to 72μF
Capacitance Tolerance	±5%
Class of Operation	Class D


2. OTHER INFORMATION

Type of packing and Lead configuration	Bulk. Multistrand copper wire leads out.
Capacitor codification system	Refer section 6 for details
Dimensional specification	Refer section 4 for details
Marking specification	Refer section 7 for details



Al can construction with resin top and flexible multistrand wire leads out for panel board application

3. PHYSICAL OUTLINE

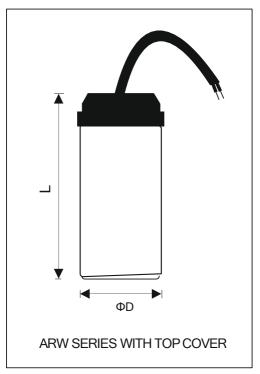

All Dimensions are in "mm"

4. <u>DIMENSIONS</u> (All units in mm)

Conn	Diameter	Length
Case Code	ØD±0.5	L±2
Code	(mm)	(mm)
EK	30	71
GK	35	71
GN	35	86
GT	35	112
JN	40	86
JT	40	112
LT	45	112
LY	45	140



Al can construction with resin top and flexible multistrand wire leads out for panel board application

5. STANDARD RATING TABLE


Part Number	Rating (µF)	Diameter Length ØD±0.5 L±2 (mm) (mm)		Case Code	Wire Length (mm)	
ARW08R0GEKPB	8	30	71	EK	250±5	
ARW08R0GGKPB	8	35	71	GK	250±5	
ARW10R0GGKPB	10	35	71	GK	250±5	
ARW12R5GGKPB	12.5	35	71	GK	250±5	
ARW15R0GGNPB	15	35	86	GN	250±5	
ARW18R0GJNPB	18	40	86	JN	250±5	
ARW20R0GJNPB	20	40	86	JN	250±5	
ARW25R0GGTPB	25	35	112	GT	250±5	
ARW25R0GJTPB	25	40	112	JT	250±5	
ARW25R0GLTPB	25	45	112	LT	250±5	
ARW30R0GJTPB	30	40	112	JT	250±5	
ARW36R0GJTPB	36	40	112	JT	250±5	
ARW36R0GLTPB	36	45	112	LT	250±5	
ARW40R0GLTPB	40	45	112	LT	250±5	
ARW45R0GLTPB	45	45	112	LT	250±5	
ARW50R0GLTPB	50	45	112	LT	250±5	
ARW60R0GLTPB	60	45	112	LT	250±5	
ARW72R0GLYPB	72	45	140	LY	250±5	



Al can construction with resin top and flexible multistrand wire leads out for panel board application


6. <u>CAPACITOR ORDERING INFORMATION</u>

Capacitors are identified with the help of a 12-digit code. Expansion of part Nos are detailed below.



a	b	c	d	e
Series Code	Capacitance Value Code	Voltage Code	Case Code	Top Cover Details
ARW: Al can,	Eg: (1) 50 μF is coded as 50R0	A - 110 V	Eg:	PB – For Panel
Resin Top, Wire	(For the range of Capacitance	B – 230 V	LT –45 x 112	Board application
termination	refer rating table)	G – 440 V		

Eg: ARW Series 50μF/440VAC With top cover

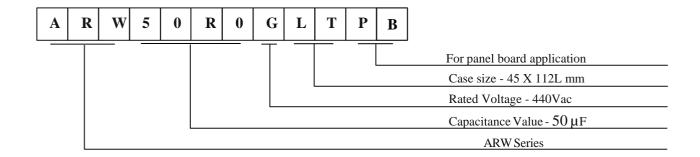



Al can construction with resin top and flexible multistrand wire leads out for panel board application

7. MARKING ON THE CAPACITOR

For ARW-PB series MPP Capacitors product information is printed on the can in black letters.

The following information are marked on the Capacitor;

1) Manufacturer's Name and Logo

EKELTRON®

2) Climatic Category

3) Nominal capacitance value in µf

4) Capacitance tolerance

5) Rated voltage

6) Rated frequency

7) Self – healing (SH)

8) Class of operation

9) Safety protection

10) Date code (Year-Month)

11) Application

8. DATE CODE

Year Code:

Year	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Letter Code	M	N	P	R	S	Т	U	V	W	X
Year	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039
Letter Code	A	В	С	D	Е	F	Н	J	K	L

Year code repeats after each cycle of 20 years

Month Code:

Month	Jan	Feb	Mar	Apr	May	June	July	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	О	N	D



Al can construction with resin top and flexible multistrand wire leads out for panel board application

9. PACKING QUANTITY

MPP Capacitors are packed in a PRIMARY cardboard carton by incorporating suitable SEPARATORS to avoid damages during transit. The primary cartons are then placed in a MOTHER Cardboard carton before shipment.

Packing quantity per primary carton are detailed below;

Case Code	No.s/ Carton
EK	100
GK	81
GN	81
GT	81
JN	64
JT	64
LT	49
LY	49