

PPW-PB SERIES

PP can construction with press-fit top cover and flexible multistrand wire lead out for panel board application

Metallised Polypropylene (MPP) Capacitors are film Capacitors, made out of two Al-Zn metallised films with plastic film acting as dielectric. PPW-PB series MPP Capacitors are with press-fit top cover, flexible multistrand copper wire lead out and encapsulated in PP can.

1. SPECIFICATIONS

Series	PPW-PB Series
Type	Metalized Polypropylene Capacitors for panel board application
Rated Voltage	440 Vac
Rated Frequency	50/60 Hz
Climatic Category	-25/85°C/21
Type	MPP-SH
Safety Protection	S0
Capacitance Range	8 to 50 μ F
Capacitance Tolerance	$\pm 5\%$
Class of Operation	Class D


2. OTHER INFORMATION

Type of packing and Lead configuration	Bulk. Multistrand copper wire lead out.
Capacitor codification system	Refer section 6 for details
Dimensional specification	Refer section 4 for details
Marking specification	Refer section 7 for details

PPW-PB SERIES

PP can construction with press-fit top cover and flexible multistrand wire lead out for panel board application

3. PHYSICAL OUTLINE

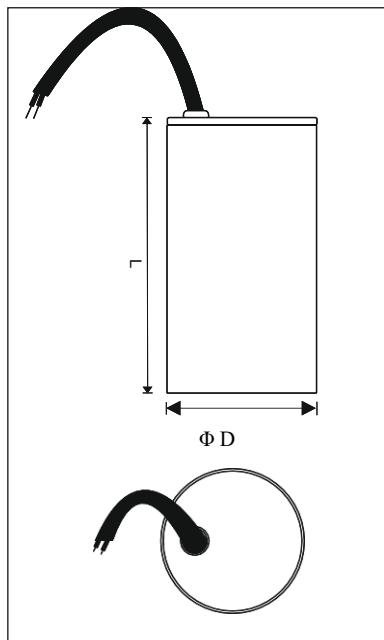

All Dimensions are in “mm”

4. DIMENSIONS (All units in mm)

Case Code	Diameter $\text{ØD}\pm 2$ (mm)	Length $L\pm 3$ (mm)
ED	30	52
GE	35	58
GK	35	71
GR	35	94
JR	40	94
LR	45	94

PPW-PB SERIES

PP can construction with press-fit top cover and flexible multistrand wire lead out for panel board application

5. STANDARD RATING TABLE


Part Number	Rating (μ F)	Diameter $\text{ØD}\pm 2$ (mm)	Length $L\pm 3$ (mm)	Case Code	Wire Length (mm)
PPW08R0GEDPB	8	30	52	ED	210 ± 5
PPW10R0GEDPB	10	30	52	ED	210 ± 5
PPW12R5GGEPB	12.5	35	58	GE	210 ± 5
PPW15R0GGEPB	15	35	58	GE	210 ± 5
PPW20R0GGKPB	20	35	71	GK	250 ± 5
PPW22R5GJKPB	22.5	40	71	JK	250 ± 5
PPW25R0GGRPB	25	35	94	GR	250 ± 5
PPW30R0GGRPB	30	35	94	GR	250 ± 5
PPW36R0GGRPB	36	35	94	GR	250 ± 5
PPW40R0GJRPB	40	40	94	JR	250 ± 5
PPW45R0GJRPB	45	40	94	JR	250 ± 5
PPW50R0GJRPB	50	40	94	JR	250 ± 5
PPW50R0GLRPB	50	45	94	LR	250 ± 5

PPW-PB SERIES

PP can construction with press-fit top cover and flexible multistrand wire lead out for panel board application


6. CAPACITOR ORDERING INFORMATION

Capacitors are identified with the help of a 12-digit code. Expansion of part Nos are detailed below.

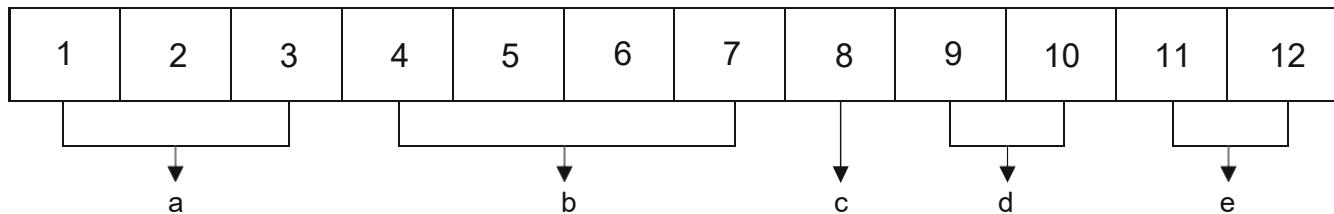

a	b	c	d	e
Series Code	Capacitance Value Code	Voltage Code	Case Code	Applications
PPW: PP can, press-fit top cover, Wire termination	Eg: (1) 30 μ F is coded as 30R0 (For the range of Capacitance refer rating table)	A - 110 V B - 230 V G - 440 V	Eg: GR -35 x 94	PB – For Panel Board application

Eg: PPW Series 30 μ F/440VAC

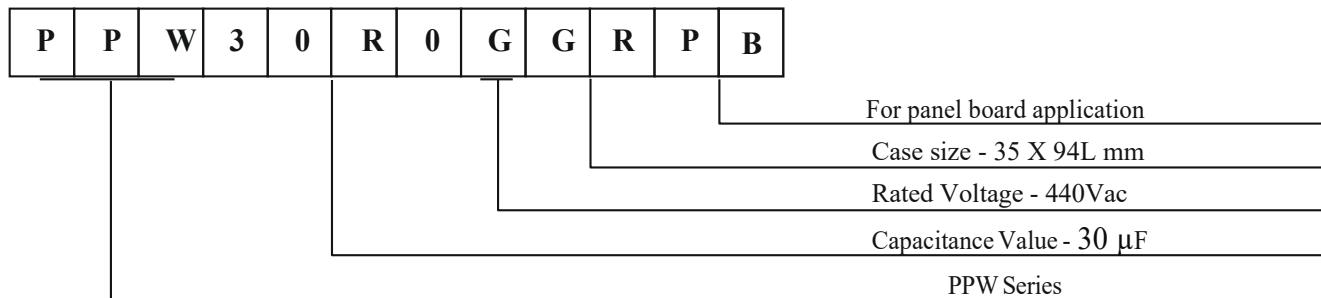

PPW-PB SERIES

PP can construction with press-fit top cover and flexible multistrand wire lead out for panel board application

7. MARKING ON THE CAPACITOR

For PPW-PB series MPP Capacitors product information is printed on the can in black letters.

The following information are marked on the Capacitor;

1) Manufacturer's Name and Logo		2) Climatic Category
3) Nominal capacitance value in μ F		4) Capacitance tolerance
5) Rated voltage		6) Rated frequency
7) Self – healing (SH)		8) Class of operation
9) Safety protection		10) Date code (Year-Month)
11) Application		

8. DATE CODE

Year Code:

Year	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Letter Code	M	N	P	R	S	T	U	V	W	X

Year	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039
Letter Code	A	B	C	D	E	F	H	J	K	L

Year code repeats after each cycle of 20 years

Month Code:

Month	Jan	Feb	Mar	Apr	May	June	July	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

PPW-PB SERIES

PP can construction with press-fit top cover and flexible multistrand wire lead out for panel board application

9. PACKING QUANTITY

MPP Capacitors are packed in a PRIMARY cardboard carton by incorporating suitable SEPERATORS to avoid damages during transit. The primary cartons are then placed in a MOTHER Cardboard carton before shipment.

Packing quantity per primary carton are detailed below;

Case Code	No.s/ Carton
ED	81
GE	81
GK	81
GR	81
JR	64
LR	49