

PRW-PB SERIES

PP can construction with resin top and flexible multistrand wire leads out for panel board application

Metallized Polypropylene (MPP) Capacitors are film Capacitors, made out of two Al-Zn metallized films with plastic film acting as dielectric. PRW-PB series MPP Capacitors are with resin top sealing, flexible multistrand copper wire leads out and encapsulated in PP can with black cap.

1. SPECIFICATIONS

Series	PRW-PB Series
Type	Metallized Polypropylene Capacitors for panel board application
Rated Voltage	440 Vac
Rated Frequency	50/60 Hz
Climatic Category	-25/85°C/21
Type	MPP-SH
Safety Protection	P0
Capacitance Range	55 to 100 μ F
Capacitance Tolerance	\pm 5%
Class of Operation	Class D


2. OTHER INFORMATION

Type of packing and Lead configuration	Bulk. Multistrand copper wire lead out.
Capacitor codification system	Refer section 6 for details
Dimensional specification	Refer section 4 for details
Marking specification	Refer section 7 for details

PRW-PB SERIES

PP can construction with resin top and flexible multistrand wire leads out for panel board application

3. PHYSICAL OUTLINE

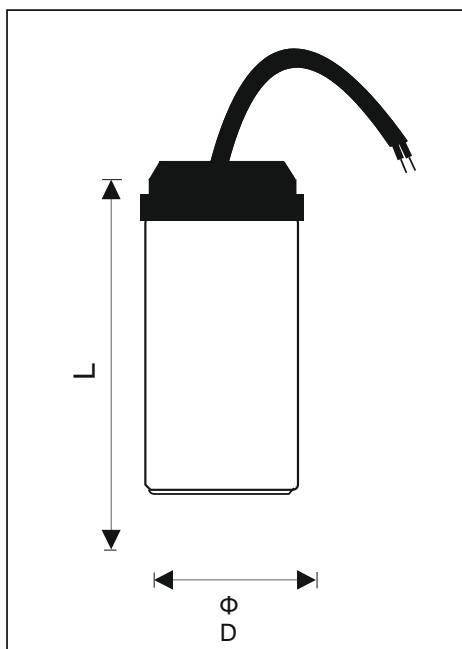

All Dimensions are in “mm”

4. DIMENSIONS (All units in mm)

Case Code	Diameter $\text{ØD} \pm 1$ (mm)	Length $L \pm 3$ (mm)
LS	45	110
NS	50	110
QY	54	140

5. STANDARD RATING TABLE


Part Number	Rating (μF)	Diameter $\text{ØD} \pm 1$ (mm)	Length $L \pm 3$ (mm)	Case Code	Wire Length (mm)
PRW55R0GLSPB	55	45	110	LS	250 ± 5
PRW60R0GLSPB	60	45	110	LS	250 ± 5
PRW72R0GNSPB	72	50	110	NS	250 ± 5
PRW100RGQYPB	100	54	140	QY	250 ± 5

PRW-PB SERIES

PP can construction with resin top and flexible multistrand wire leads out for panel board application


6. CAPACITOR ORDERING INFORMATION

Capacitors are identified with the help of a 12-digit code. Expansion of part Nos are detailed below.

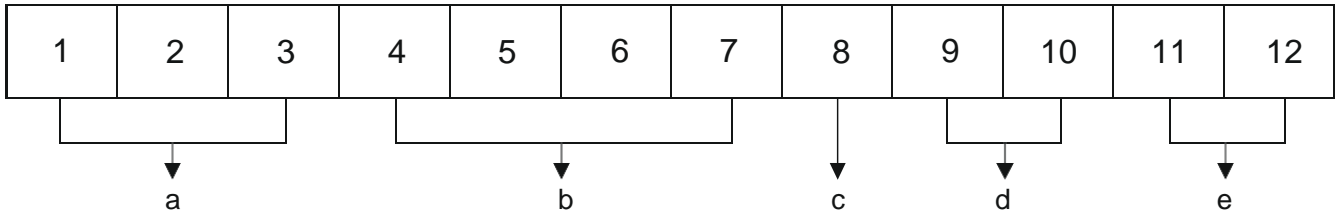

a	b	c	d	e
Series Code	Capacitance Value Code	Voltage Code	Case Code	Applications
PRW: PP can, Resin Top, Wire termination	Eg: (1) 60 μF is coded as 60R0 (For the range of Capacitance refer rating table)	A - 110 V B - 230 V G - 440 V	Eg: NS -50 x 110	PB – For Panel Board application

Eg: PRW Series 60μF/440VAC
With top cover

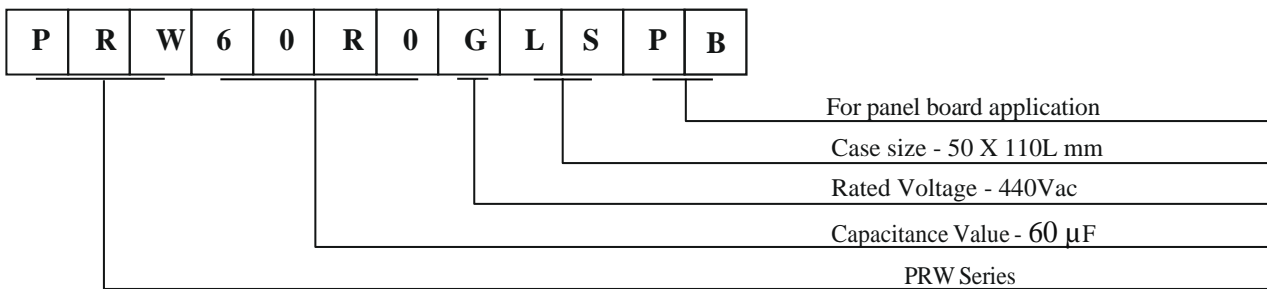


PRW-PB SERIES

PP can construction with resin top and flexible multistrand wire leads out for panel board application

7. MARKING ON THE CAPACITOR

For PRW-PB series MPP Capacitors product information is printed on the can in black letters.

The following information are marked on the Capacitor;

- | | | |
|---|---|----------------------------|
| 1) Manufacturer's Name and Logo |  | 2) Climatic Category |
| 3) Nominal capacitance value in μf | | 4) Capacitance tolerance |
| 5) Rated voltage | | 6) Rated frequency |
| 7) Self – healing (SH) | | 8) Class of operation |
| 9) Safety protection | | 10) Date code (Year-Month) |
| 11) Application | | |

8. DATE CODE

Year Code:

Year	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Letter Code	M	N	P	R	S	T	U	V	W	X
Year	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039
Letter Code	A	B	C	D	E	F	H	J	K	L

Year code repeats after each cycle of 20 years

Month Code:

Month	Jan	Feb	Mar	Apr	May	June	July	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

PRW-PB SERIES

PP can construction with resin top and flexible multistrand wire leads out for panel board application

9. PACKING QUANTITY

MPP Capacitors are packed in a PRIMARY cardboard carton by incorporating suitable SEPARATORS to avoid damages during transit. The primary cartons are then placed in a MOTHER Cardboard carton before shipment.

Packing quantity per primary carton are detailed below;

Case Code	No.s/ Carton
LS	49
NS	36
QY	36